



## Setting the Record Quality and Frame Rate on a Silverline Prospect MPEG-4 DVR

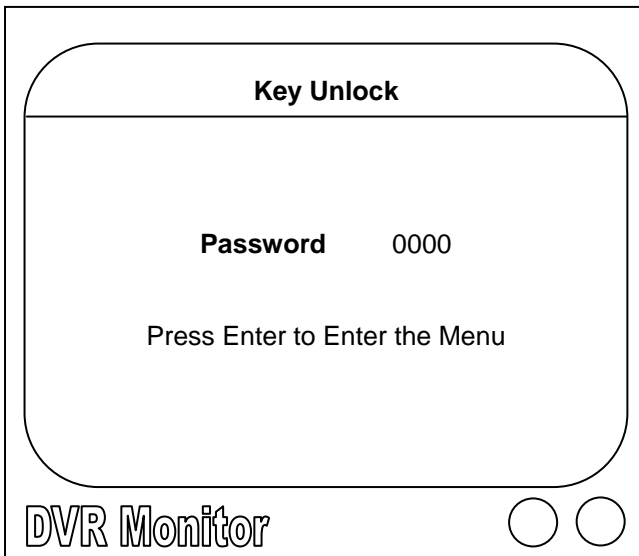


Press the **Menu** button to access the password screen.

Enter your password using the **+** and **-** buttons and then press the **Enter** button. The default password is **0000**.

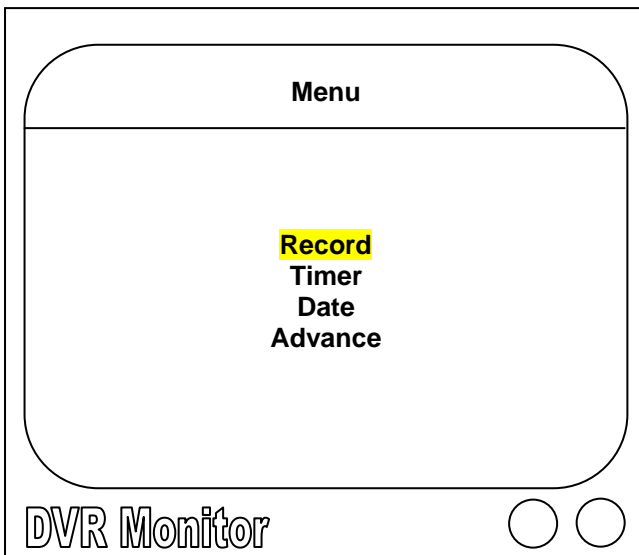


Highlight the **Record** Menu and press the **Enter** Button

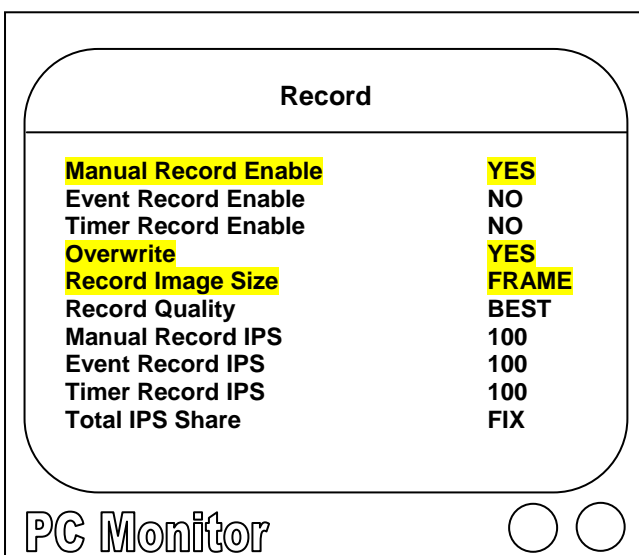

Set the **Manual Record Enable** option to **YES** using the **+** button

Scroll down to **Overwrite** using the **▼** button and set it to **YES** to allow the DVR to continue recording when the hard drive is full.

Scroll down to **Record Image Size** using the **▼** button and set it to **FRAME** to make the DVR record at high resolution.

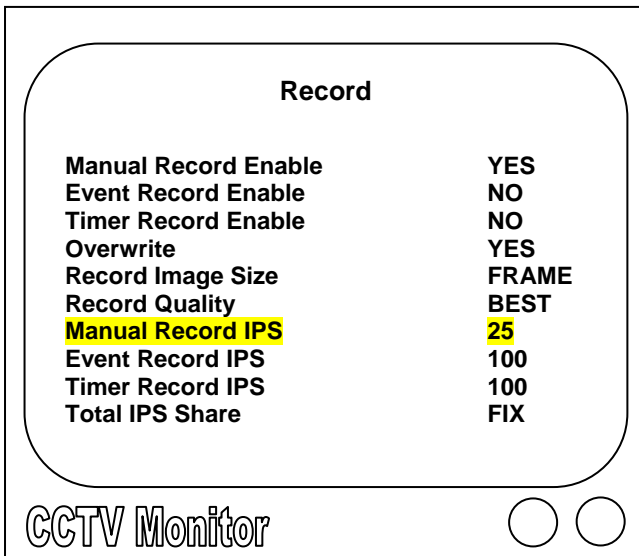

Scroll down to **Manual Record IPS** using the ▼ button and set it to whatever frame rate you need to get your required amount of recording time by using the + and - buttons.

Once you have set these settings press the **Menu** button to save the settings and continue pressing the **Menu** button until you are out of the menu completely.

**More information on setting the DVR record settings for your specific needs can be obtained in the DVR user manual that was packaged in the box.**